


Technical Information

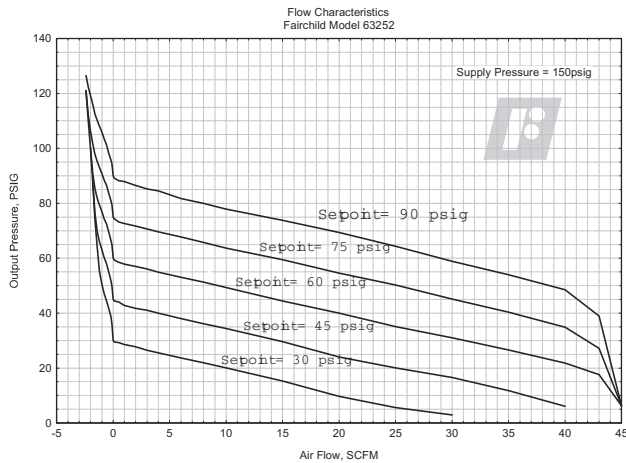

Specifications

Supply Pressure

250 psig, [17 BAR], (1700 kPa) Maximum

Flow Capacity (SCFM)

25 (42.5 m³/HR) @ 100 psig, [7 BAR], (700 kPa) supply and 20 psig, [1.5 BAR], (150 kPa) setpoint

Exhaust Capacity (SCFM)

0.8 (1.36 m³/HR) where downstream pressure is 5 psig, [.35 BAR], (35 kPa) above 20 psig, [1.5 BAR], (150 kPa) setpoint. (0.8 scfm for 120 # unit)

Maximum Supply Pressure

250 psig, [14 BAR], (1400 kPa)

Consumption

Undetectable

Supply Pressure Effect

Less than 1.25 psig, [.09 BAR], (9 kPa) change for 100 psig, [7.0 BAR], (700 kPa) change in supply pressure (1.90 psig for 120 # unit)

Sensitivity

1" (2.50 cm) Water Column

Temperature Range

-40° F to + 160° F, (-40° C to + 71° C)

Materials of Construction

Body and HousingEpoxy Coated Aluminum
TrimStainless Steel, Nickel Plated Steel
ElastomersNitrile

Catalog Information

Catalog Number 6 3 2 2

Pressure Range

psig	[BAR]	(kPa)	Option
0.5-30	[0.03-2]	(3-200)	3
1-60	[0.07-4]	(7-400)	4
2-120	[0.14-8]	(14-800)	5

Port Size

1/4" 2

Port Thread

NPT N
BSPP H
BSPT U

Actuator

Knob K
Screw S
Tamper Proof T

Options

Stainless Steel Trim/Drain S
Screen in Exhaust Port M
Quick Bleed Valve C
2" Pressure Gauge Option (NPT Only) G

Installation Instructions

For installations instructions, refer to the *Fairchild Model 63 Pneumatic Filter Regulator Instruction, Operation and Maintenance Instructions, IS-10000063*.

Ihr Ansprechpartner für
Beratung, Verkauf, Service



Kundert Ingenieure AG

Ilfangstrasse 6, CH – 8952 Schlieren
Tel. +41 44 755 42 42, Fax +41 44 755 42 43

www.kundert-ing.ch automation@kundert-ing.ch